

# DAF-250Ex

FRONT-MOUNTED MULCHERS

Achieve  
**High Productivity  
and Low Costs**

in land clearing and vegetation control.

ideal for intensive brushcutting applications mounted on wheeled or tracked skid steers or other dedicated units that are designed for use with front-mounted attachments.



Industrial Land Clearing



Forest Fire Prevention



Road Development  
and Maintenance



Pipelines Development  
and Maintenance



Transmission Lines  
Development and Maintenance

# DAF-250Ex

## FRONT-MOUNTED MULCHERS



### Motor

Variable displacement, axial-piston motors that minimize overheating and improve re-acceleration.




### Drive

Industrial cogged belt drive system that prevents slippage and reduces effort applied to bearings compared with V-belts, for longer bearing life.



### Rings

Protective rings that limit the size of the bites and considerably reduce risks of breakage on the knife holders.

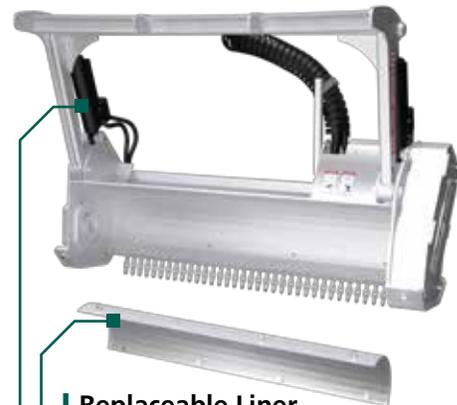


### Replaceable Liner

With the high speeds and forces involved in industrial mulching, even the hardest steel frame is subject to wear and tear. This easy-to-replace, bolt-in wear liner extends the lifetime of the unit by protecting the frame.

### Hydraulic pushbar option

Especially useful when working in older growth as a secure way to direct where big trees will fall when cutting them down

SPECIFICATIONS	DAF-250Ex	HYDRAULIC SYSTEM	DAF-250Ex
Approximate Min. Carrier Power [kW (hp)]	190 (250)	Variable Displacement Axial Piston Motor [cc]	2x 115
Cutting Width [cm (in)]	251 (99)	Required Continuous Flow [L/min (gal/min)]	276 (73)
Cutting Distance from Ground Level [cm (in)]	1 (0.4)	Max. Operating Pressure [bar (psi)]	240 (3500)
Number of Blades on Rotor	35	Rotating Speed [rpm]	2500
Optimal Target Material Diameter [cm (in)]	60 (24)	Pressure Line I.D. [# (in)]	#20 (1.25)
Exterior Width [cm (in)]	261 (103)	Return Line I.D. [# (in)]	#20 (1.25)
Exterior Height (with Pushbar) [cm (in)]	155 (61)	Drain Line I.D. [# (in)]	#16 (1.00)
Exterior Width (with Pushbar) [cm (in)]	127 (50)		
Exterior Height (without Pushbar) [cm (in)]	98 (38)	OPTIONS	DAF-250Ex
Exterior Width (without Pushbar) [cm (in)]	83 (33)	Type of Sharpenable Bolt-on Forged Blades	Standard
Rotor Diameter [cm (in)]	51 (20)	Hydraulic Pushbar	✓
Approximate Typical Weight [kg (lbs)]	2450 (5400)	Bolt-on wear liner	✓

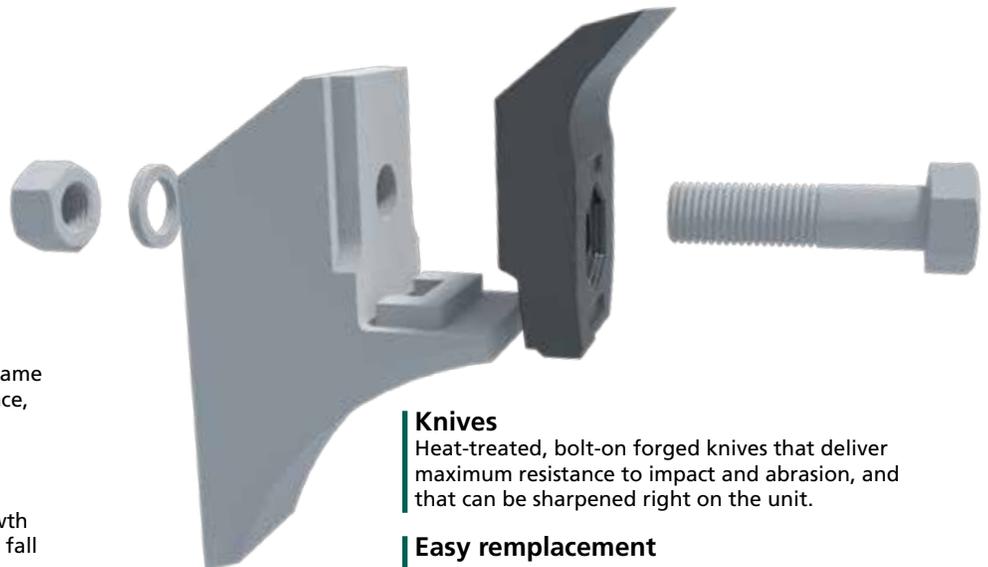

### Knives

Heat-treated, bolt-on forged knives that deliver maximum resistance to impact and abrasion, and that can be sharpened right on the unit.

### Easy replacement

Easy-to-replace knives: A single nut and bolt holds the knife in place. Replacing worn knives is a very easy.

## CONTACT US

Printed in Canada : 2018-02

211 rue Notre-Dame  
Roxton Falls QC J0H 1E0  
Canada  
www.deniscimaf.com

Toll free : 877-279-2300  
Phone : 450-548-7007  
Fax: 450-548-7008  
info@deniscimaf.com

**DENIS**  **CIMAF**